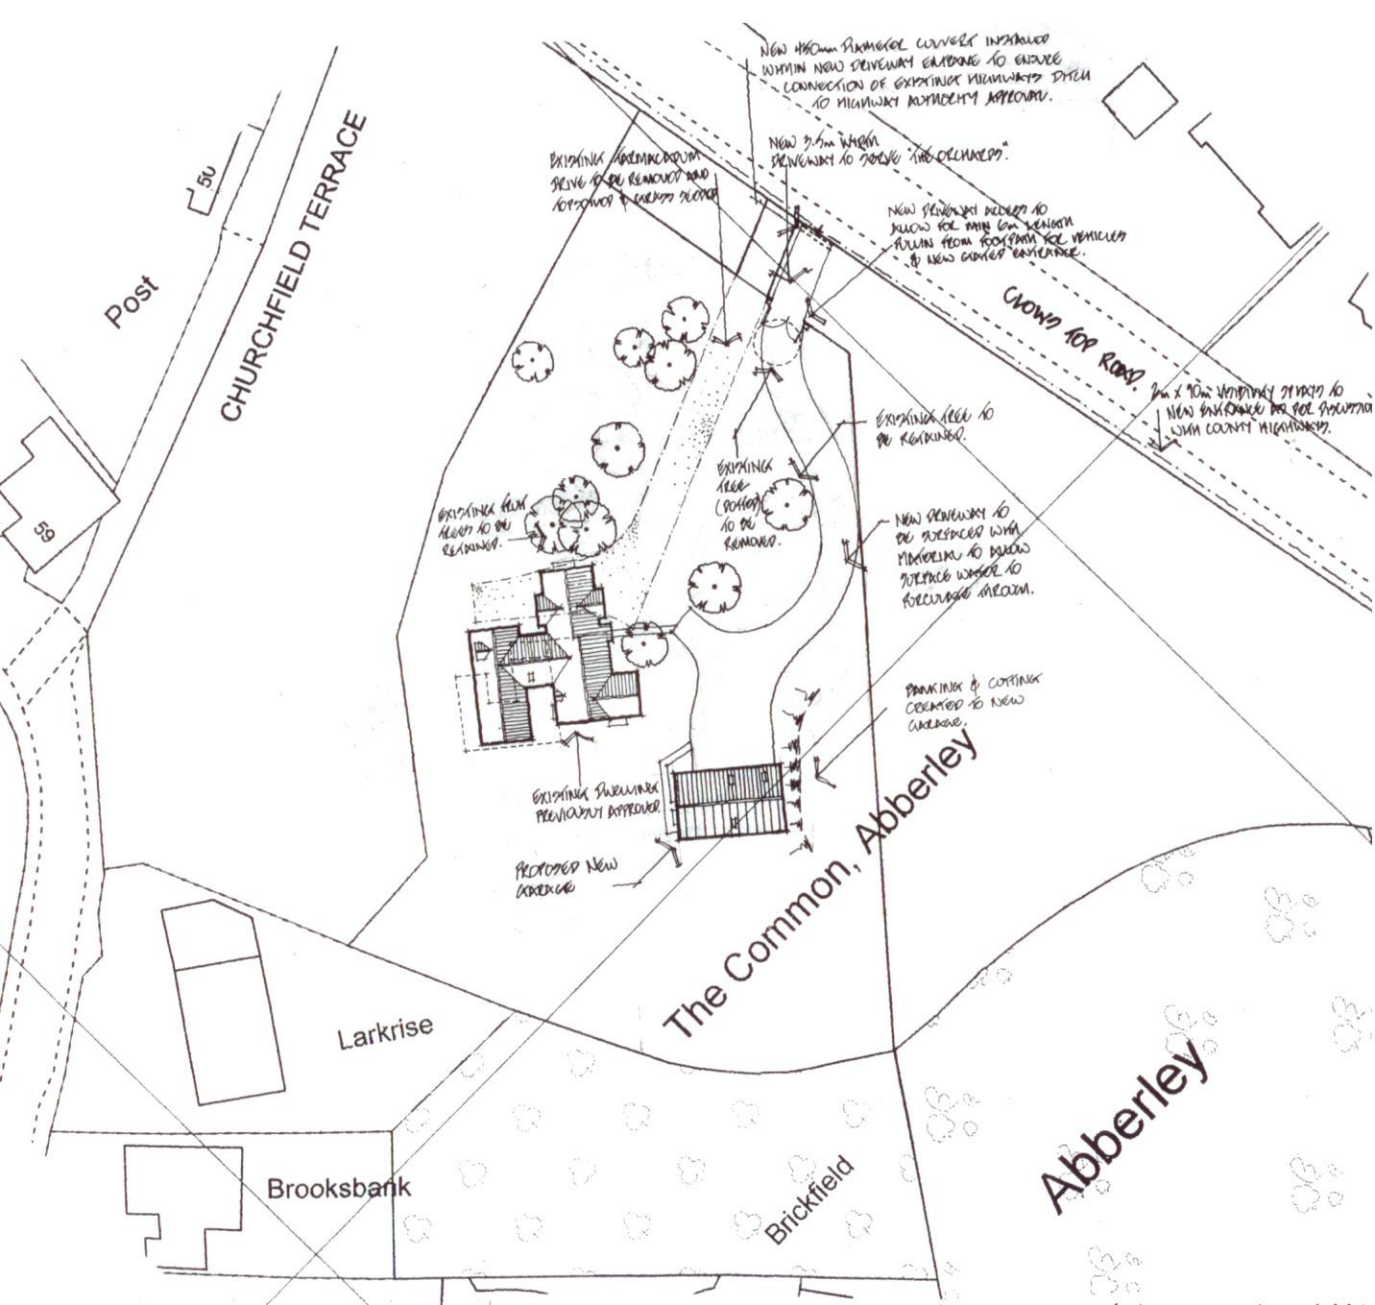
NEW 450mm DIAMETER CULVERT INSTALLED WITHIN NEW DRIVEWAY EMBANKMENT TO ENSURE CONNECTION OF EXISTING HIGHWAYS DITCH TO HIGHWAY AUTHORITY APPROVAL.
NEW 3.5m WIDE DRIVEWAY TO PROVIDE "TWO CHANNELS".
EXISTING TARMACADAM DRIVE TO BE REMOVED AND REPLACED & LEVELS ADJUSTED
NEW DRIVEWAY RADII TO ALLOW FOR MIN 6m LENGTH RUNIN FROM FOOTPATH FOR VEHICLES & NEW GARDEN ENTRANCE.
CROWN TOP ROAD.
2m x 90m VISIBILITY SPLAYS TO NEW ENTRANCE TO BE AGREED WITH COUNTY HIGHWAYS.
EXISTING TREE TO BE RETAINED.
EXISTING TREE (DEAD) TO BE REMOVED.
EXISTING TREE TO BE RETAINED.
NEW DRIVEWAY TO BE SURFACED WITH PERMEABLE TO ALLOW SURFACE WATER TO PERCOLATE THROUGH.
BRANCHES & CUTTINGS CREATED TO NEW GARDEN.
EXISTING DRIVEWAY PREVIOUSLY APPROVED
PROPOSED NEW GARAGE
Post
CHURCHFIELD TERRACE
50
56
The Common, Abberley
Larkrise
Brooksbank
Brickfield
Abberley